


DIN 1481 – sim. ISO 8752

Kołki sprężyste gładkie, typ A

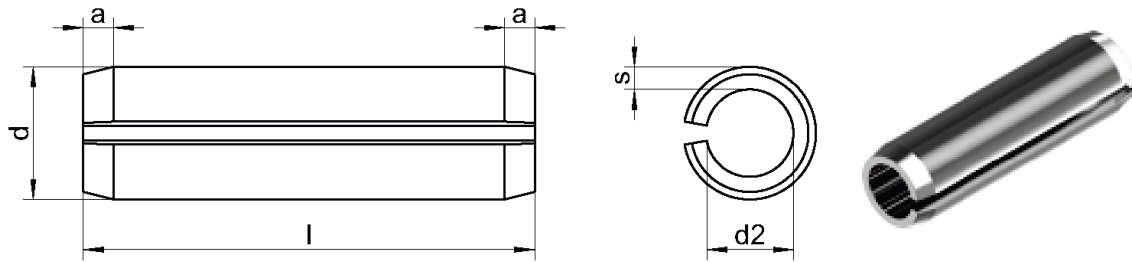

a min.	0,15	0,25	0,35	0,40	0,50	0,60	0,65	0,80	0,90	1,20	2,00	2,00	2,00
d min.	1,2	1,7	2,3	2,8	3,3	3,8	4,4	4,9	5,4	6,4	8,5	10,5	12,5
d2	0,8	1,1	1,5	1,8	2,1	2,3	2,8	2,9	3,4	3,9	5,5	6,5	7,5
s	0,20	0,30	0,40	0,50	0,60	0,75	0,80	1,00	1,00	1,25	1,50	2,00	2,50
Długość / Ø	1	1,5	2	2,5	3	3,5	4	4,5	5	6	8	10	12
4	FS	FS	FS	FS	FS	FS	FS						
5	FS	FS	FS	FS	FS	FS	FS						
6	FS	FS	FS	FS	FS	FS	FS	FS	FS				
8	FS	FS	FS	FS	FS	FS	FS	FS	FS				
10	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
12	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
14	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
16	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
18	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
20	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
22			FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
24			FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
26			FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
28			FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
30			FS	FS	FS	FS	FS	FS	FS	FS	FS	FS	FS
32					FS	FS	FS	FS	FS	FS	FS	FS	FS
36					FS	FS	FS	FS	FS	FS	FS	FS	FS
40					FS	FS	FS	FS	FS	FS	FS	FS	FS
45							FS	FS	FS	FS	FS	FS	FS
50							FS	FS	FS	FS	FS	FS	FS
55									FS	FS	FS	FS	FS
60									FS	FS	FS	FS	FS
65									FS	FS	FS	FS	FS
70									FS	FS	FS	FS	FS
75										FS	FS	FS	FS
80										FS	FS	FS	FS
90											FS	FS	FS
100												FS	FS
Opakowanie	1000	1000	1000	1000	1000	1000	500	500	500 ≥50 250	500 ≥40 250	500 ≥26 250 ≥90 100	500 ≥26 250 ≥90 100	25