


## DIN 6799

### Podkładki zabezpieczające do wałów

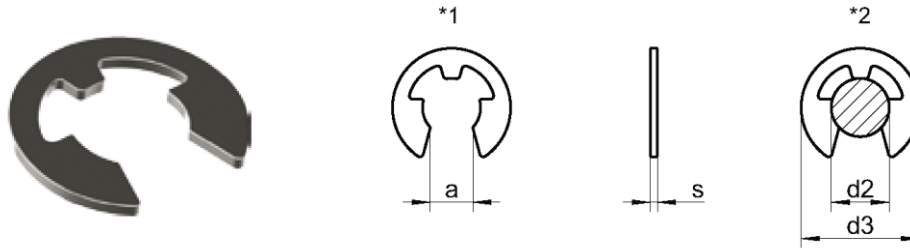

d2	do Ø	d3	s	a
1,2	1,4-2,0	3,25	0,30	1,01
1,5	2,0-2,5	4,25	0,40	1,28
1,9	2,5-3,0	4,80	0,50	1,61
2,3	3,0-4,0	6,30	0,60	1,94
3,2	4,0-5,0	7,30	0,60	2,70
4,0	5,0-7,0	9,30	0,70	3,34
5,0	6,0-8,0	11,30	0,70	4,11
6,0	7,0-9,0	12,30	0,70	5,26
7,0	8,0-11,0	14,30	0,90	5,84
8,0	9,0-12,0	16,30	1,00	6,52
9,0	10,0-14,0	18,80	1,10	7,63
10,0	11,0-15,0	20,40	1,20	8,32
12,0	13,0-18,0	23,40	1,30	10,45
15,0	16,0-24,0	29,40	1,50	12,61
19,0	20,0-31,0	37,60	1,75	15,92
24,0	25,0-38,0	44,60	2,00	21,88

Material	Opakowanie
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	500
1.4122	100
1.4122	100
1.4122	50
1.4122	50
1.4122	50