


DIN 7337 typ A – sim. ISO 15983

Nity zrywalne, typ A

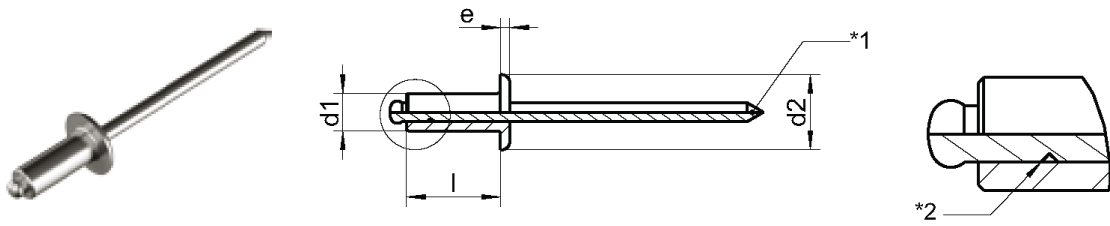

d1	d2	rozmiar	l	e
3,0	6,5	1,0-3,0	6	0,8
3,0	6,5	3,0-5,0	8	0,8
3,0	6,5	5,0-7,0	10	0,8
3,0	6,5	7,0-9,0	12	0,8
3,0	6,5	8,0-12,0	16	0,8
3,2	6,5	1,0-3,0	6	0,8
3,2	6,5	3,0-5,0	8	0,8
3,2	6,5	5,0-7,0	10	0,8
3,2	6,5	7,0-9,0	12	0,8
3,2	6,5	9,0-12,0	14	6,5
3,2	6,5	9,0-12,0	16	0,8
4,0	8,0	1,0-2,5	6	1,0
4,0	8,0	2,5-4,5	8	1,0
4,0	8,0	4,5-6,5	10	1,0
4,0	8,0	6,5-8,5	12	1,0
4,0	8,0	12,0-16,0	14	1,0
4,0	8,0	8,5-12,0	16	1,0
4,0	8,0	11,5-14,0	18	1,0
4,0	8,0	12,0-16,0	20	1,0
4,0	8,0	12,0-16,0	25	1,0
4,8	9,5	2,0-4,0	8	1,1
4,8	9,5	4,0-6,0	10	1,1
4,8	9,5	6,0-8,0	12	1,1
4,8	9,5	8,0-11,0	16	1,1
4,8	9,5	10,0-13,0	18	1,1
4,8	9,5	11,0-15,0	20	1,1
5,0	9,5	2,0-4,0	8	1,1
5,0	9,5	4,0-6,0	10	1,1
5,0	9,5	6,0-8,0	12	1,1
5,0	9,5	8,0-11,0	16	1,1
5,0	9,5	10,0-13,0	18	1,1
5,0	9,5	11,0-15,0	20	1,1
5,0	9,5	15,0-20,0	25	1,1

Material	Opakowanie
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500
A2	500