


DIN 917

Nakrętki sześciokątne ślepe

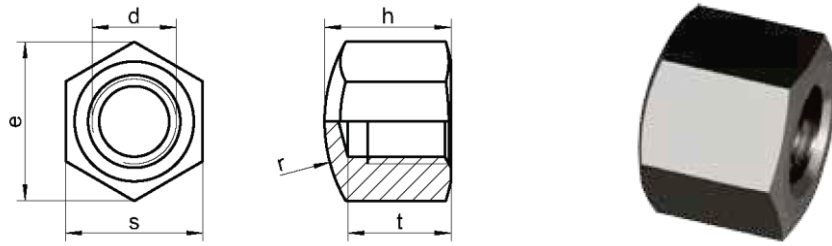

d	h	s	e	r	t min.	t max.	
3	-	5,5	6,01	-	-	-	5,5
4	5,5	7	7,66	8	4,16	4,64	7
5	7,0	8	8,79	10	4,96	5,44	8
6	9,0	10	11,05	12	6,71	7,29	10
8	12,0	13	14,38	15	9,21	9,79	13
10	14,0	17	17,77	20	10,65	11,35	17
12	16,0	19	20,03	25	13,15	13,85	19
14	18,0	22	23,35	28	14,65	15,35	22
16	20,0	24	26,75	30	16,65	17,35	24
18	22,0	27	29,56	32	18,58	19,42	27
20	25,0	30	32,95	35	20,58	21,42	30
22	28,0	32	37,29	35	21,58	22,42	32
24	30,0	36	39,55	40	23,58	24,42	36
27	32,0	41	45,20	50	25,58	26,42	41
30	34,0	46	50,85	60	27,58	28,42	46

Material	Opakowanie
A2 / A4	200
A2 / A4	200
A2 / A4	200
A2 / A4	200
A2 / A4	200
A2 / A4	100
A2 / A4	100
A2 / A4	50
A2 / A4	50
A2 / A4	50
A2 / A4	25
A2 / A4	25
A2 / A4	10
A2 / A4	10
A2 / A4	10