


DIN 923

Śruby z łbem walcowym z posadzeniem wysokim i nacięciem prostym

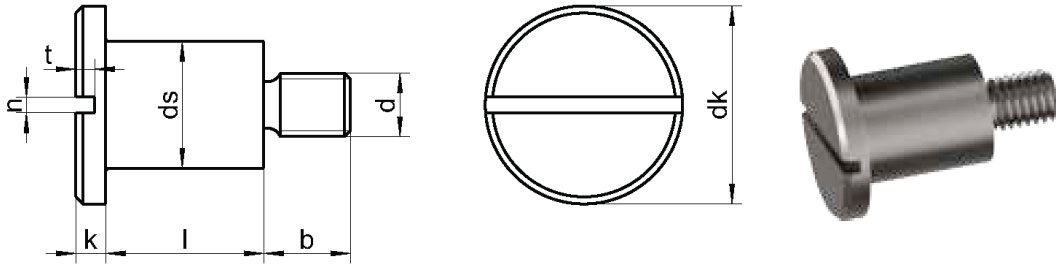

dk	7,0	8,5	11,0	13,0	16,0
k	1,8	2,4	2,7	3,1	3,8
n	0,8	1,0	1,2	1,6	2,0
t min.	0,9	1,2	1,3	1,5	1,9
b	4,5	6,0	7,0	9,0	11,0
ds	4,0	5,5	7,0	8,0	10,0
⊖	0,8x4,0	1,0x5,5	1,2x7,0	1,6x9,0	2,0x12,0
Długość / Ø	M3	M4	M5	M6	M8
4	A1	A1	A1	A1	
5	A1	A1	A1	A1	
6	A1	A1	A1	A1	A1
8	A1	A1	A1	A1	A1
10	A1	A1	A1	A1	A1
12	A1	A1	A1	A1	A1
16	A1	A1	A1	A1	A1
20				A1	A1
Opakowanie	100	100	100	50	50