


DIN 985 – sim. ISO 10511 Nakrętki samohamowne niskie

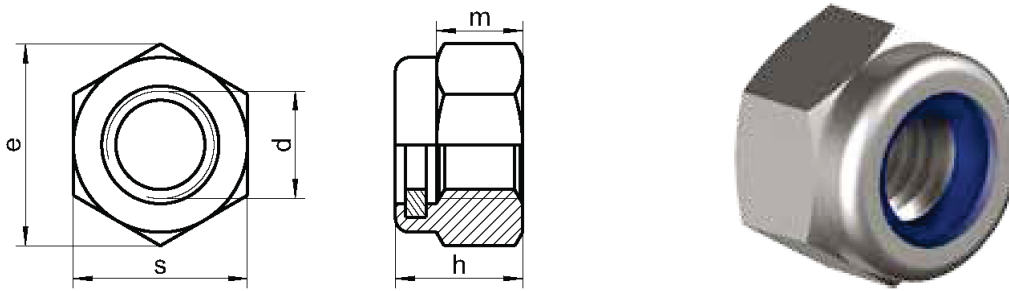



d	m	h	s	e	⬡
M2,5	3,5	2,3	5	5,50	5
M3	2,4	2,4	5,5	6,01	5,5
M4	2,9	2,9	7	7,66	7
M5	3,2	3,2	8	8,79	8
M6	4,0	6,0	10	11,05	10
M8	5,5	8,0	13	14,38	13
M10	6,5	10,0	17	18,90	17
M12	8,0	12,0	19	21,10	19
M14	9,5	14,0	22	24,49	22
M16	10,5	16,0	24	26,76	24
M18	13,0	18,5	27	29,56	27
M20	14,0	20,0	30	32,95	30
M22	15,0	22,0	32	35,03	32
M24	15,0	24,0	36	39,55	36
M27	17,0	27,0	41	45,20	41
M30	19,0	30,0	46	50,85	46
M33	22,0	33,0	50	55,37	50
M36	25,0	36,0	55	60,79	55

Material	Opakowanie
A2 / A4	1000
A2 / A4	1000
A2 / A4	1000
A2 / A4	1000
A2 / A4	500
A2 / A4	200
A2 / A4	100
A2 / A4	100
A2 / A4	100
A2 / A4	50
A2 / A4	50
A2 / A4	50
A2 / A4	25
A2 / A4	25
A2 / A4	25
A2 / A4	25
A2 / A4	25

DIN 985

Nakrętki samohamowne niskie drobnozwojowe

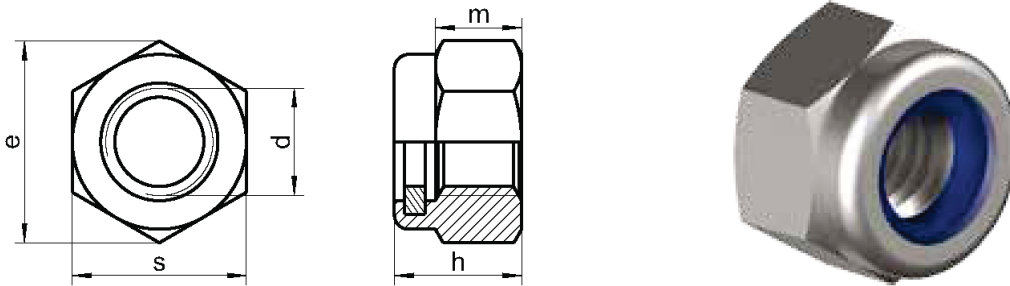

d	m min.	h	s	e min.	
M8x1	5,5	8,0	13	14,38	13
M10x1	6,5	10,0	17	18,90	17
M12x1,5	8,0	12,0	19	21,10	19
M16x1,5	10,5	16,0	24	26,76	24
M20x1,5	14,0	20,0	30	32,95	30
M24x1,5	15,0	24,0	36	39,55	36

Material	Opakowanie
A2 / A4	200
A2 / A4	100
A2 / A4	100
A2 / A4	50
A2 / A4	50
A2 / A4	25