


DIN 432

Podkładki odginane zewnętrzne

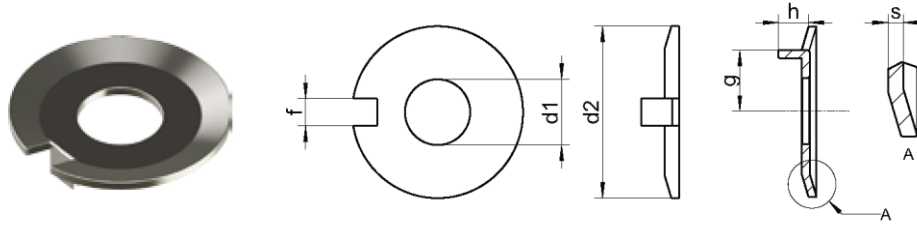

d1	do gwintu	d2	h	s	f	g
4,3	M4	14	2,0	0,40	2,5	5,5
5,3	M5	17	2,5	0,75	3,5	7,0
6,4	M6	19	3,0	0,75	3,5	7,5
8,4	M8	22	4,0	1,00	3,5	8,5
10,5	M10	26	4,0	1,00	4,5	10,0
13,0	M12	30	4,5	1,20	4,5	12,0
15,0	M14	33	4,5	1,20	4,5	13,0
17,0	M16	36	4,5	1,20	5,5	15,0
19,0	M18	40	4,5	1,20	6,5	18,0
21,0	M20	42	4,5	1,60	6,5	18,0
23,0	M22	50	6,5	1,60	7,5	20,0
25,0	M24	50	6,5	1,60	7,5	21,0
28,0	M27	58	9,5	1,60	8,5	23,0
31,0	M30	63	9,5	1,60	8,5	25,0
34,0	M33	68	9,5	1,60	9,5	28,0
37,0	M36	75	9,5	2,00	11,0	31,0
40,0	M39	83	11,0	2,00	11,0	33,0

Materiał	Opakowanie
A2 / A4	100
A2 / A4	100
A2 / A4	100
A2 / A4	100
A2 / A4	100
A2 / A4	50
A2 / A4	50
A2 / A4	50
A2 / A4	50
A2 / A4	50
A2 / A4	50
A2 / A4	25
A2 / A4	25
A2 / A4	25
A2 / A4	25
A2 / A4	20
A2 / A4	20
A2 / A4	10